


Technical data sheet - Recital

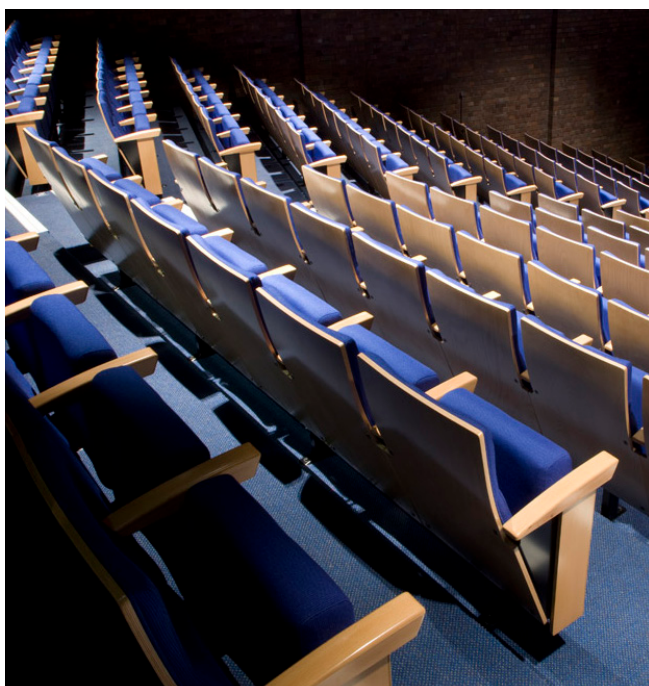

Description

A stand-out multipurpose upholstered chair suitable for use on telescopic platforms or as a fixed auditorium chair. The retractable version is cleverly designed with seat, back, arms and end panels which fold into a small envelope to allow platforms to be retracted.


Features

- Designed for comfort with good lumbar support
- Complies with the highest level of test (level 4) for the European strength standard EN 12727:2000
- Enclosed, damped, spring-tip mechanism for safety and smooth, silent action
- Ideal for stand alone applications, or for use on TX platform systems - TX version is suitable for min. 280mm row rise
- Decorative timber panel to rear (optional for seat pan)
- Optional writing tablet

Dimensions

- Seat width (centre to centre): 500mm, 520mm, 540mm
 - Minimum row rise on telescopic platforms without fascias: 280mm*
 - Minimum row depth on telescopic platforms: 900mm
- * Should fascias be chosen, the minimum row depth needed is 950mm with a 280mm row rise. Please note, for row rises in excess of 280mm with fascias, a 1000mm row depth is required.



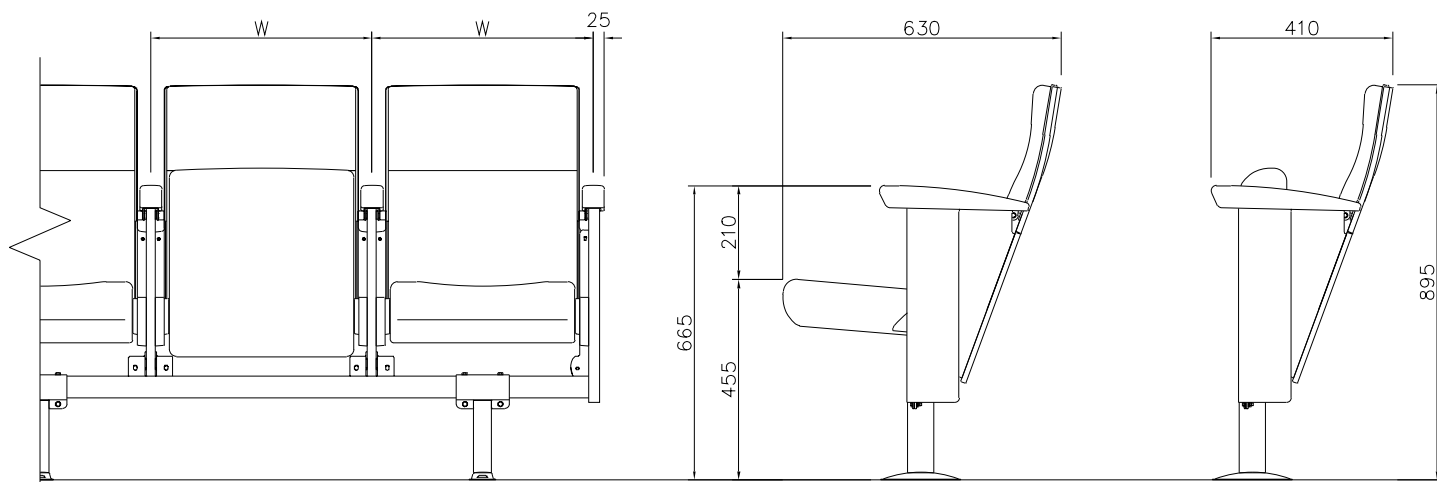

Standard Specification

- **Seat:** Timber core, with moulded polyurethane foam, fully upholstered OR incorporating a plywood outer protection panel.
- **Back:** Timber core, with moulded polyurethane foam, incorporating a plywood outer protection panel.
- **Tipping Mechanism:** Damped, self rising spring tip mechanism.
- **Armrests:** Solid timber with clear lacquer.
- **End Panels:** Steel plate with beech veneered timber show panel.
- **Steelwork Finish:** Epoxy polyester powder coated finish, colour RAL 9005 black.
- **Fold Down Mechanism (when used with TX platforms):** Manually operated RUM mechanism.
- **Fabric:** Complying with BS 5852 1990, sources 0, 1 and 5, or other standards as specified.

Standards

Strength and stability

Tested and certified to BS EN 12727:2000 Level 4

Flammability

Upholstery fabric and foam comply with BS 5852 1990 (sources BS EN 1021-1, 0; BS EN 1021-2, 1 and 5) or European or other standards as specified.