

Uniclass EPIC Q411

CI/SfB 5+7 | (72.6) | X |

Issue 03.5 | Sep 20

Technical data sheet - Zenith




Above: Tread fixed Zenith chairs Right (top to bottom): Zenith chairs on retractable platform, Fixed Zenith chairs with onserts, Zeniths fixed onto an aluminium rail.



This blow moulded chair is one of the toughest of its kind on the market, proven in multipurpose arenas, schools and sports centres worldwide. Ergonomically designed for comfort, it's suitable for use across areas of retractable, fixed and removable seating.


Features

- Certified to the strength standard BS EN 12727:2000 at the highest test level (Grade 4).
- Double skinned, blow moulded plastic seat and backrest
- Ergonomically designed with good lumbar support
- Curved backrest for comfort even when spectator turns their body
- Ideal for stand alone applications, or for use on TX platform systems; armrests, where used, automatically fold away as the chair folds down on to the platform
- Also available for use on an aluminium rail, which may be curved up to 3 degrees - ideal for an arena setting
- Slim profile creating safe and easy access
- Enclosed spring-tip mechanism for safety
- Seat number position on seatpan plus large indent suitable for sponsor's plaque on backrest

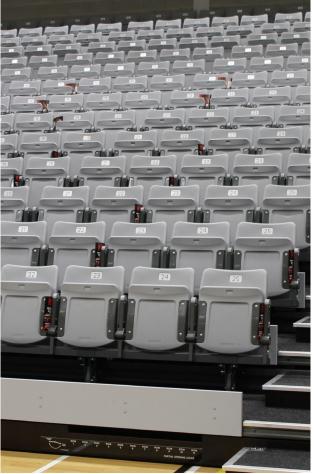





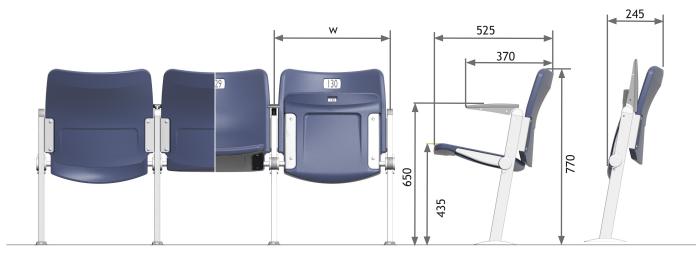

Drawing shows tread fixed chair. Height measurements are taken at seat centre. All dimensions are nominal.

Seat widths

450, 480, 500, 520, 540mm

Fixing methods

Tread fixed, riser fixed, beam mounted (tread or riser fixed), fold-down (for TX Telescopic Platforms) or matrix (for flat floor configurations).

Finishes

Frame

Metal parts in epoxy powder coat, black RAL 9005.

Other colours available on special request, please consult Audience Systems for availability. Tube end plugs in black RAL 9005.

Seat and back mouldings

Refer to Zenith colour card for standard selection. Other colours available on request.

Armrests / Leg top caps (for chairs with no arms)

Black RAL 9005.

Specification

Seat

Blow moulded double skinned UV stabilised high density polyethylene. Exposed surfaces have textured finish.

Backrest

Blow moulded double skinned UV stabilised high density polyethylene. Exposed surfaces have textured finish.

Chair frame

Fabricated steel construction with associated steel pressings for fixing seat and back.

Chair rail (aluminium rail model only)

Extruded aluminium

Seat tip up mechanism

Innovative cast aluminium pivot. The seat pan automatically tips when not in use. Entire mechanism is housed in a protection cover for safety, preventing any possibility of finger entrapment.

Armrest

Optional armrest in injection moulded ABS.

Tube end plugs

Injection moulded polyethylene.

Standards

Strength and stability

Satisfies the requirements of BS EN 12727:2000 Grade 4 (severe).

Flammability

The standard UV stabilised mouldings pass BS 5852 1990 (sources BS EN 1021-0 and BS EN 1021-1). Flame retardant polypropylene mouldings, which comply with BS 5852 pt 2 ignition source 5 are also available in certain colours at extra cost.

Options and accessories

- Padded seat onsert
- Padded back onsert
- Seat number or sponsor's plaque
- Aisle letters

